


AEW-5501(1200RPM)



AEW-5501

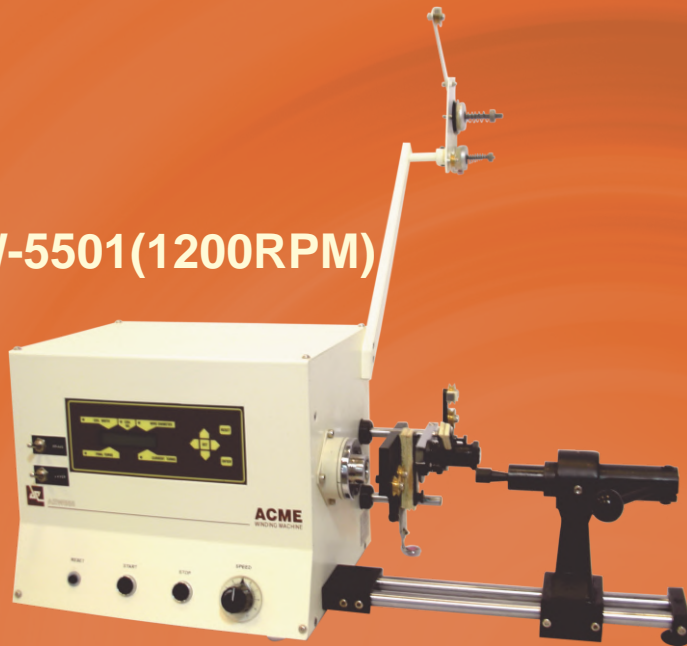

FEATURES:


- Variable speed with speed control knob.
- Constant speed on full load and no load.
- Programmable parameters like turns, width and wire size.
- Factory programmed soft start and soft stop.
- 195 program memory bank with tapping facility.
- Standard wire guide and standard tensioner unit are the standard accessories included with the machine.

Download detailed features and specification from website or ask for it.

OPTIONAL ACCESSORIES:

- Live centre tail stock for support from other side
- Horizontal tensioner unit for heating wires
- Wire guide with nozzle for thin wire

*For improving performance, ACME Mechatronics, Inc. reserves the right to make changes in specifications and machines without prior notice

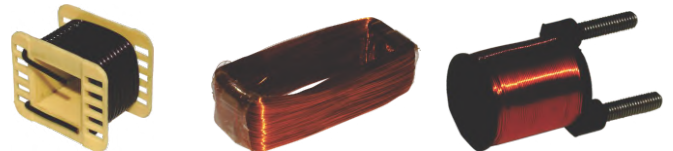

Production Capability	AEW-5501	AEW-5501 (1200RPM)	Technical Specification	Description
Wire Size upto(in / AWG)	0.04 / 18	0.08 / 12	Spindle Motor	0.25HP DC
Winding Width(in)	3.9	3.9	Traverse Motor	0.9Deg., Stepping
Bobbin Diameter(in)	3.9	3.9	Controller	16 Bit Microcontroller
Speed in RPM(max.)	3000	1200	Supply Voltage	110± 5%Vac, 60Hz.
Dimension(WxDxH in)	18x22x23	25x13x12	Power Consumption	275 W