

Programmable winding machine : HMI – Servo based

E 600

Coil winding machine
with fast tailstock



www.erasan.es



Layout




Technical specifications



Torque and speed



Electronics

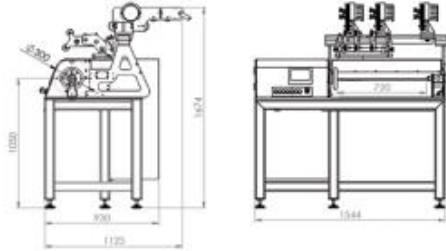

Wire diameter	0.01 to 3 mm
Max winding length	520 mm
Distance between points	720 mm
Max winding diameter	300 mm
Guider precision	0.01 mm
Electrical supply	380V + N + GND Vca/ 50 Hz
Max Power	2.2 Kw
Net weight	600 Kg

	3000 rpm	6000 rpm	9000 rpm
Belt position 1	3000 rpm / 6 Nm	6000 rpm / 3 Nm	9000 rpm / 2 Nm
Belt position 2	1500 rpm / 12 Nm	3000 rpm / 6 Nm	6000 rpm / 3 Nm
Belt position 3	750 rpm / 24 Nm	1500 rpm / 12 Nm	3000 rpm / 6 Nm

Ethernet communication	Included
Max number of programmable windings	10,000 windings (200 per recipe)
Storage	SD Card
Touch screen	7"
Windows Software: Win Bobbin PC	Optional
Machine control	By means of touch screen, buttons and foot pedal



ACME Mechatronics, Inc.

Reg. Off.: 1505 Douglas Ave,
Colleyville, TX 76034. USA

Works: 4451 Dale Earnhardt Way,
Unit B22, Northlake, TX 76262

Phone: 682-237-7121

Cell: 858-790-2397

E-mail: sales@acmemechatronics.com

URL: www.acmemechatronics.com