



ACME

Mechatronics, Inc.

Programmable winding machine : HMI – Servo based

E 900

Coil winding machine
with fast tailstock



www.erasan.es



Layout




Technical specifications



Torque and speed



Electronics

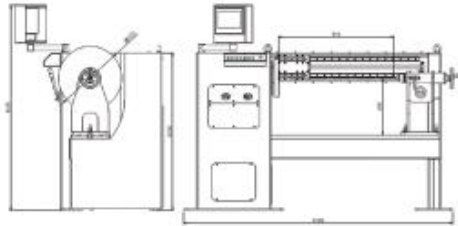

Wire diameter	0.01 to 3 mm
Max winding length	800 mm
Distance between points	910 mm
Max winding diameter	500 mm
Guider precision	0.01 mm
Electrical supply	380V + N + GND Vca/ 50 Hz
Max Power	5,5 Kw
Net weight	1150 Kg

	500 rpm	250 rpm
Belt position 1	500 rpm / 172 Nm	250 rpm / 413 Nm
Belt position 2	96 rpm / 1033 Nm	69 rpm / 1447 Nm

Ethernet communication	Included
Max number of programmable windings	10.000 windings (200 per recipe)
Storage	SD Card
Touch screen	10"
Windows Software: Win Bobbin PC	Optional
Machine control	By means of touch screen, buttons and foot pedal



ACME Mechatronics, Inc.

Reg. Off.: 1505 Douglas Ave,
Colleyville, TX 76034. USA

Works: 4451 Dale Earnhardt Way,
Unit B22, Northlake, TX 76262

Phone: 682-237-7121

Cell: 858-790-2397

E-mail: sales@acmemechatronics.com

URL: www.acmemechatronics.com